



SPECIAL FEATURES


- Metal Chassis
- PIP / PBP / VOV Multi Display Function
- 3D Comb Filter / Deinterlace, Noise Reduction, LCD Protection Glass, Source Cycle Function, Trigger Source Switching, Multi-Language Support
- BNC Video 2 In / 2 Out, S-Video 1 In / 1 Out, VGA 1 In, Component 1 In, DVI-D 1 In, HDMI 1 In, Audio 2 In, PC Stereo 1 In
- Built-In Speakers
- Wall and Rack Mount Kit

SPECIFICATIONS

		20RTH
Display	Screen Size	20.1 Inch
	Max. Resolution	1600 x 1200 @ 75Hz
	Pixel Pitch	0.255 x 0.255mm
	Brightness	300cd/m ²
	Contrast Ratio	800 : 1
	Aspect Ratio	4 : 3
	Viewing Angle (H/V)	178° / 178°
	Display Color	16.7 Million
	Response Time	< 16ms
	Video System	NTSC / PAL
	Frequency (H)	60~75 KHz(H)
Frequency (V)	55~75 KHz(V)	
Interface	Video In / Out (BNC Type)	2 / 2
	S-Video In / Out	1 / 1
	VGA In (15Pin D-Sub)	1
	Component	1
	DVI-D In / HDMI In	1 / 1
	Audio In (RCA Type)	2 (L+R)
	PC Stereo In	1
	Remote Control	Yes
Audio	Built-in Speakers	Yes (2W x 2)
	Multiple Display Function	PIP / PBP / VOV
Features	Filter Type	3D Comb Filter / Deinterlace
	Trigger Sensor	Yes (NO / NC)
	LCD Protection Glass	Yes
	Multi Language	English, Spanish, French, German, Italian
Dimension	Outline Dimension (W x H x D)	17.89" x 15.04" x 5.3"
	Net. Weight	7.9Kg (18.3lbs)
Cabinet	Material / Color	Metal / Black
	Base Stand	Folding Leg
Warranty	Part/Labor	1year / 1year
	MTBF (Approx.)	45,000 Hours
Regulations		RoHS, TUV NRTL (optional) , CB, FCC(A), CE-Emc(LVD)
Power	Consumption: < On	< 60W
	Electrical Ratings	AC100 ~ 240V(50/60Hz) DC24V / 2.5A
Circumstance	Operating Temperature	10 ~ 40°C / 50 ~ 104°F
Mounts	VESA™ Mount Size	100 x 100mm (BS M4 x 8mm Screw)
	Wall	WB-5, WB-10, WB-30, WB-31
	Ceiling	CMK-01
	Rack	N/A

*Design and specifications are subject to change without notice

DIMENSIONS

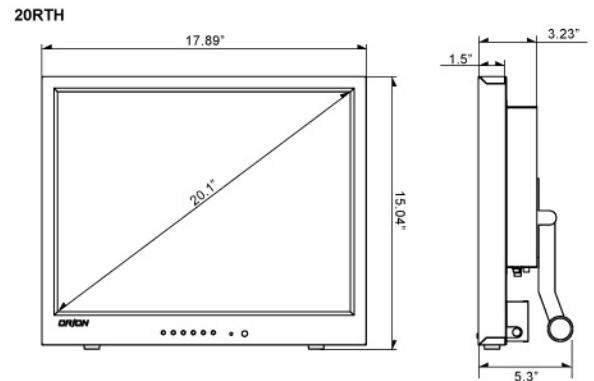

MOUNT OPTION



Optional CMK-01 for Ceiling Mount



Optional RMK-08 for Rack Mount