


Overview

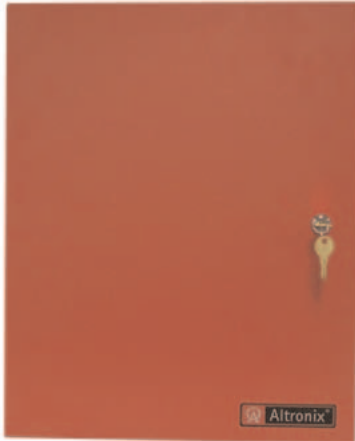

- The AL1012ULACMJ / AL1012ULACMCBJ converts an 115VAC 60Hz input into eight (8) independently controlled 12VDC Fail-Safe and/or Fail-Secure outputs with a total of 10 amp continuous supply current. These power outputs can be converted to dry form "C" contacts (AL1012ULACMJ only). Outputs are activated by an open collector sink or normally open (NO) dry trigger input from an Access Control System, Card Reader, Keypad, Push Button, PIR, etc. These units will route power to a variety of access control hardware devices including Mag Locks, Electric Strikes, Magnetic Door Holders, etc. The outputs will operate in both Fail-Safe and/or Fail-Secure modes. The units are designed to be powered by one common power source (factory installed) which will provide power for both the board operation and locking devices, or two (2) totally independent power sources, one (1) providing power for board operation and the other for lock / accessory power. The FACP Interface enables Emergency Egress, Alarm Monitoring, or may be used to trigger other auxiliary devices. The fire alarm disconnect feature is individually selectable for any or all of the eight (8) outputs.

AL1012ULACMJ

- Eight (8) independently controlled fuse protected outputs.

AL1012ULACMCBJ

- Eight (8) independently controlled PTC protected outputs.
- Class 2 Rated power limited outputs.

Specifications

- 12VDC @ 10 amp supply current.
- Power supply input options:
 - a) One (1) common power input for ACM8/ACM8CB and lock power (factory installed).
 - b) Two (2) isolated power inputs - One (1) to power the ACM8/ACM8CB and one (1) for lock accessory power, (external power supply is required). (Current is determined by the power supply connected, not to exceed a maximum of 10 amp total).
- Eight (8) Access Control System trigger inputs. Input options:
 - a) Eight (8) normally open (NO) inputs.
 - b) Eight (8) open collector inputs.
 - c) Any combination of the above.
- Eight (8) independently controlled outputs. Output options:
 - a) Eight (8) Fail-Safe and/or Fail-Secure power outputs.
 - b) Eight (8) dry form "C" 5 amp rated relay outputs (AL1012ULACMJ only).
 - c) Any combination of the above.
- Eight (8) auxiliary power outputs (unswitched)
- Output ratings:
 - Fuses are rated @ 3.5 amp (AL1012ULACMJ).
 - PTCs are rated @ 2.5 amp (AL1012ULACMCBJ).
- Input 115VAC 60Hz rated @ 1.9 amp.
- ACM8 board main fuse is rated at 10 amp.
- Filtered and electronically regulated outputs (built-in power supply).
- Short circuit and thermal overload protection.
- Red LEDs indicate outputs are triggered (relays energized).
- Fire Alarm disconnect (latching or non-latching) is individually selectable for any or all of the eight (8) outputs. Fire Alarm disconnect input options:
 - a) Normally open (NO) or normally closed (NC) dry contact input.
 - b) Polarity reversal input from FACP signaling circuit.
- Alarm output relay indicates that FACP input is triggered (form "C" contact rated @ 1 amp 28VDC not evaluated by UL).
- Green LED indicates when FACP disconnect is triggered.
- Built-in charger for sealed lead acid or gel type batteries.
- AL1012ULXB (Power Supply Board) maximum charge current .7 amp.
- Automatic switch over to stand-by battery when AC fails.
- Zero voltage drop when unit switches over to battery backup (AC failure condition).
- AC fail supervision (form "C" contact).
- Battery fail and battery presence supervision (form "C" contact).
- AC input and DC output LED indicators.
- Enclosure accommodates up to two (2) 12AH batteries.

- Product weight:
 - AL1012ULACMJ: 14.1 lbs.
 - AL1012ULACMCBJ: 13.7 lbs.

- Shipping weight:
 - AL1012ULACMJ: 15.3 lbs.
 - AL1012ULACMCBJ: 14.9 lbs.

Agency Approvals



UL Listed for Access Control Systems Units
(UL 294).



CUL Listed - CSA Standard C22.2
No.205-M1983 Signal Equipment.

Enclosure Dimensions

18”H x 14.5”W x 4.625”D

