


PD4ULCB

UL Listed Power Distribution Module

Description

Altronix PD4ULCB UL Listed Sub-Assembly power distribution module is designed to convert a single AC or DC input into four (4) PTC protected Class 2 Rated power-limited outputs.

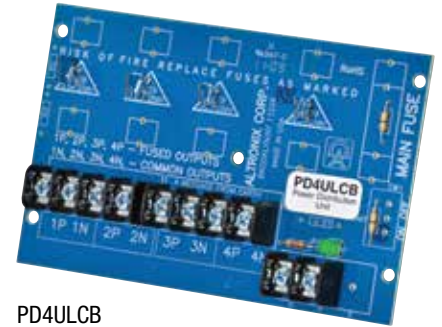

PD4ULCB

Specifications

Input

Voltage Range 12VDC or 24VDC, up to 10A or
24VAC or 28VAC, up to 12A.

Outputs

Four (4) PTC protected Class 2 Rated power-limited outputs.
2A per output max.
Total output current should not exceed max current rating of
power supply employed.
PTCs are rated @ 2.5A/250V.

Indicators (LED)

DC Output Power LED.

Agency Listings

UL:

Access Control UL294

Burglar Alarm UL603

Fire Alarm UL1481

cUL:

General Signaling Equipment Evaluated to
CSA Standard C22.2 No.205-M1983.

Power Supplies for Burglar Alarm Systems
ULC-5318-96.

Physical and Environmental

Dimensions (W x L x H)

3.25" x 5.25" x 1" (82.55mm x 133.35mm x 25.4mm).

Product Weight 0.15 lbs. (0.07 kg).

Shipping Weight 0.25 lbs. (0.11 kg).

Temperature

Operating 0 to 49° C (32 to 120° F).

Storage -20 to 70° C (-4 to 158° F).

Relative Humidity 85% +/-5%.